




Gravel Fill Hydraulic Conductivity, Zone 2

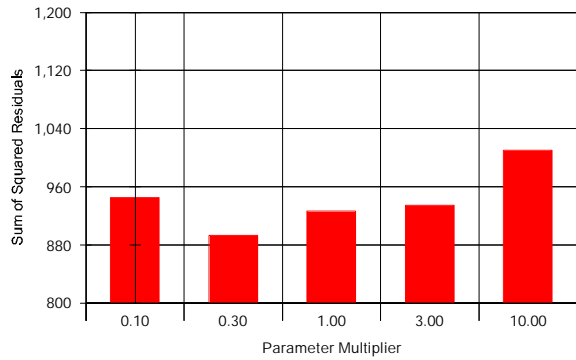


Stiff Fissured Clay Hydraulic Conductivity, Zone 4

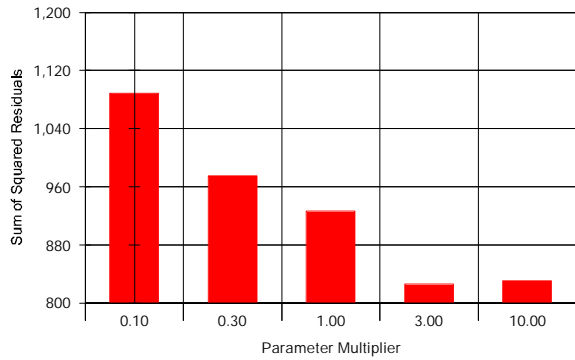


Stiff Fissured Clay Vert. Hyd. Conductivity, Zone 4

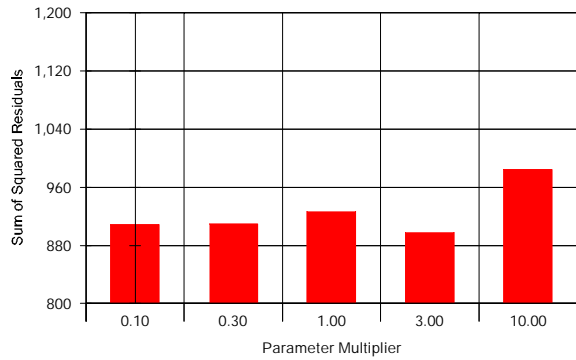


Ball Field Clay Fill Hyd. Conductivity, Zone 23

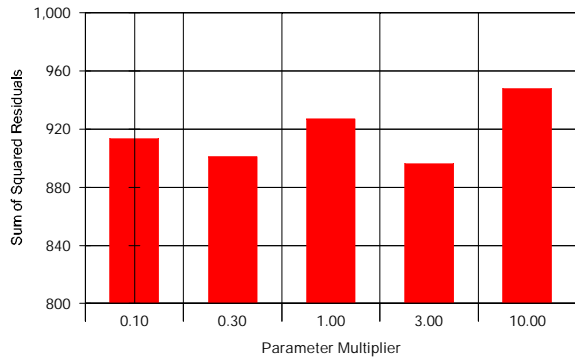

Ballfield Clay Fill, Vert. Hyd. Conductivity, Zone 23

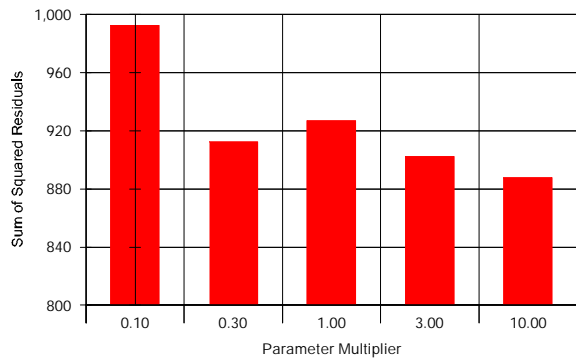

Clay Fill Hydraulic Conductivity, Zone 6

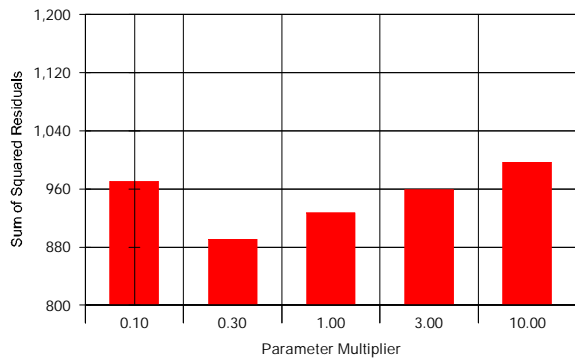

These graphs were generated by running the MODFLOW model with the calibrated data set, but varying a single individual model input parameter by the multiplier as identified on the X-axis of each graph. The Y-axis shows the size of the sum of the squares of each residual, which is used as a measure of the calibration of the model. The smaller the sum of the squares of the residuals, the better the calibration, according to that particular measure.



Maine Yankee

MAINE YANKEE RCRA CLOSURE - Bailey Point CMS Report

DRAWINGS PRODUCED BY:
STRATEX, DICKENSON & ASSOCIATES, and
JACQUES WHITFORD COMPANY

DRAWING TITLE:

SENSITIVITY ANALYSIS

DATE PREPARED: 03-01-05

DESIGNED BY: MPD

DRAWN BY: TS

CHECKED BY: MPD

REVIEWED BY: NOS

PROJECT NAME/FILE NAME:
CMS/FIG 5

PROJECT NUMBER/PHASE:
MEPO4103/1

SCALE:
NTS

PREPARED FOR:
MAINE YANKEE, Wiscasset ME

FIGURE NO.

5-16A